

After that remove kick panel, two screws holding it in place.



Next to remove plastic on center pillar, there are two clips at the top, pull out from about midway.




Clips are about here, one either side.

Then remove bolt holding seat belt, remove seat belt mechanism and take out plastic protector



I found it easier to feed the speaker wires through the rubber piece going from door to car once removed. Same with front doors.

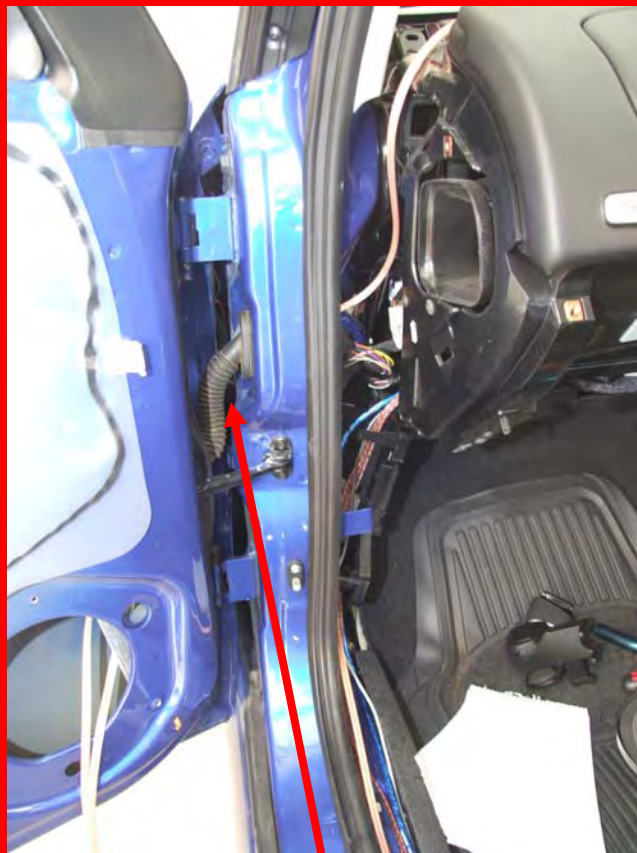

Remove